

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS

SDRH3818 SERIES



FEATURES:

- Magnetically Shielded Structure
- Low DC Resistance
- Large current up to 1.8A
- Excellent Mechanical Strength
- High Reliability and Excellent Solderability
- Low and square Profile
- High heat resistance

COMMON APPLICATIONS:

- VCRs, Notebook, DC/DC Converters
- Video Digital Cameras
- Communication System
- Automotive Systems Power supplier
- LCD PDP Televisions
- Hard Disk Drives, Topset, XDSL
- Network Systems
- Computer Peripheral Equipment


ELECTRICAL CHARACTERISTICS:

Part Number	L (μH)	Test Freq (kHz)	DCR Ω Max	IDC Max A
SDRH3818-1R0□	1.0	100	0.030	1.80
SDRH3818-2R2□	2.2	100	0.058	1.50
SDRH3818-3R3□	3.3	100	0.064	1.30
SDRH3818-4R7□	4.7	100	0.146	1.10
SDRH3818-5R6□	5.6	100	0.176	0.95
SDRH3818-6R8□	6.8	100	0.238	0.90
SDRH3818-8R2□	8.2	100	0.272	0.80
SDRH3818-100□	10	1	0.299	0.70
SDRH3818-150□	15	1	0.472	0.61
SDRH3818-220□	22	1	0.592	0.52
SDRH3818-270□	27	1	0.630	0.44
SDRH3818-330□	33	1	1.075	0.43
SDRH3818-470□	47	1	1.309	0.34
SDRH3818-680□	68	1	2.613	0.25
SDRH3818-820□	82	1	2.950	0.20
SDRH3818-101□	100	1	3.255	0.19
SDRH3818-151□	150	1	3.500	0.12

□: 1. K= ± 10%, M= ± 20%, N= ± 30%

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS:


DIMENSIONS IN:mm

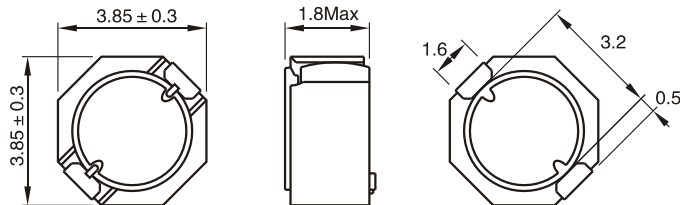

CONSTRUCTION



LAND PATTERNS



- Inductor Testing: HP4284A (Equivalent acceptable)
 - DCR: QuadTech 1880 Milliohm meter
 - Q- HP4342A – SRF-HP4191A
 - IDCMax current is decreased 10% against its initial value
 - Operating temperature: -40°C to +105°C
 - Storage Temperature: -40°C to +105°C
 - Solder methods: Vapor Phase, Infrared Reflow
 - Resistance to soldering heat: 260°C for 10 seconds
 - Solvent resistance: Conforms to MIL-STD-202E
 - Marking: Inductance & Tolerance
- Note: All specifications subject to change without notice.